

VISION **Adagio Pro**

LED lights available in different diameters, luminous flux levels and colours.

Wide beam angle shadow-free pool lighting.

Polymer housing, **compatible with salt-electrolysis**.

RGB: 14 fixed colour programs.

TW: 7 fixed white tones and blue.

For RGB & TW, advanced and unique **DuraNet Communication Technology*** in combination with Link Mini, Link One, Link Three, Link Controller & Link Master:

- Free choice of colour
- Dimming
- Link Touch compatible
- DMX512 & RS485 compatible
- Automatic synchronisation

PAR56 niche **retrofit** solution, size 170 only.

Easy to install, operates on 12VAC with 2-wire cabling, connection via unique connector.

Part of DURAVISION: seamless integration with VISION Wall Conduits and VISION Face Plates.

Included in packaging:

- Adagio Pro light
- 2-core cable of 4 meters
- QuickConnect™ kit with Clips Nut
- Retrofit kit PAR56 niche (170mm only)

Examples of finishes



*Ultra flat finish of just 2mm.
Combination of PLP100-RGB light with
the PZA100-FLAT-SS Face Plate Ultra Flat.*



*Standard finish for any type of pool.
Combination of PLP100-RGB light with
the PZA100-RF-WH Face Plate.*

* **DuraNet Communication Technology**


Unique communication protocol over the power cable. Allows full control of connected Duratech products with a single cable.

Technical Specifications

		WARM WHITE			WHITE		
PRODUCT CODE		PLP050-WW	PLP100-WW	PLP170-WW	PLP050-WH	PLP100-WH	PLP170-WH
Diameter	mm	50	100	170	50	100	170
Nominal colour temp.	K	3300			7700		
Max. light output	lm	700	2400	4950	750	2600	5500
Beam angle	°	116			116		
Max. power	W	8	23	55	8	25	57
VA Transformer	VA	10	33	74	10	33	74
Nominal input voltage	VAC	12			12		
Water temp.	°C	up to 40			up to 40		
Dimmable		-			-		
DuraNet Communication		-			-		
Warranty	year	3			3		

		TUNABLE WHITE			RGB		
PRODUCT CODE		PLP050-TW	PLP100-TW	PLP170-TW	PLP050-RGB	PLP100-RGB	PLP170-RGB
Diameter	mm	50	100	170	50	100	170
Nominal colour temp.	K	3000 - 6500 + blue			-		
Max. light output	lm	700	2150	4250	650	1900	3700
Beam angle	°	116			116		
Max. power	W	14	27	70	13	31	66
VA Transformer	VA	18	40	91	18	40	91
Nominal input voltage	VAC	12			12		
Water temp.	°C	up to 40			up to 40		
Dimmable		✓			✓		
DuraNet Communication		✓			✓		
Warranty	year	3			3		

Illumination per m²

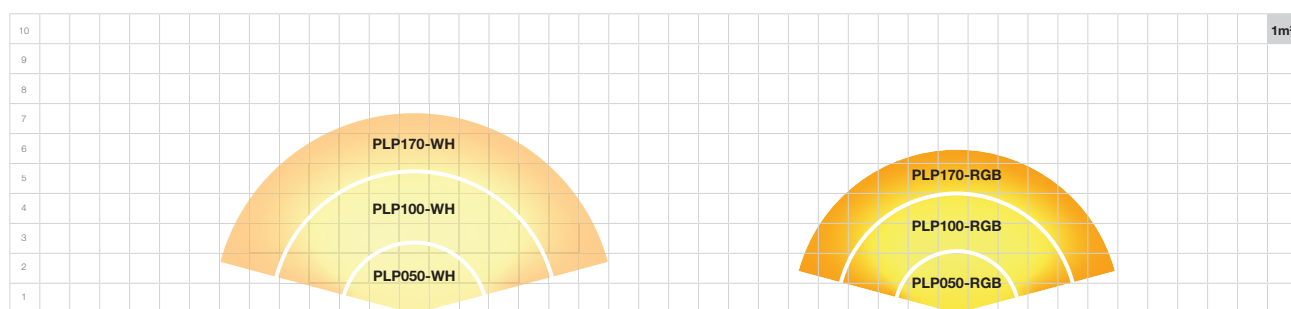

Values in graph refer to swimming pools with white or light-coloured walls that require 100-150 lm/m². Increase the light (lumen) by 50% for medium colours. Dark walls are difficult to illuminate and need up to 250% extra light.

To combine with

WALL CONDUITS	FACE PLATES	CONTROL / POWER SUPPLY
VISION Wall Conduits 1,5" p. 20	VISION Face Plates Ultra Flat p. 28	LINK Mini p. 76
VISION Wall Conduits Stainless steel p. 24	VISION Face Plates p. 32	LINK One p. 78
VISION Wall Conduits PP/PE p. 26		LINK Three p. 80
		LINK Driver p. 82
		LINK Controller p. 84
		LINK Master p. 90